



XANA 6STEP ATF

Special-High-Performance-Transmission-Fluid

Description:

XANA 6STEP ATF is a modern low-viscosity high-performance HC-synthetic automatic transmission fluid specially developed for the requirements of modern-step automatic transmission of high-performance vehicles from the Middle, Upper Class and SUV's.

The high coefficient of friction ensures a nearly slip-free transmission of high torques.

Characteristics


- Adapted friction coefficient for sporty gear changes
- Prevents annoying friction vibrations
- Outstanding friction characteristics
- Excellent low temperature switching behavior
- Extrem wear protection
- Highest oxidation and aging stability
- Minimal foaming
- Neutral towards sealing materials

Usable for

Effects

- Lowered viscosity for improved fuel efficiency
- Optimal operating reliability at extreme conditions
- Best lubrication
- Protection against adhesions
- Keeps the gear clean
- Prolongs the life and performance of the gearbox
- Visco-stability under extreme conditions in the high temperature area

Utilization

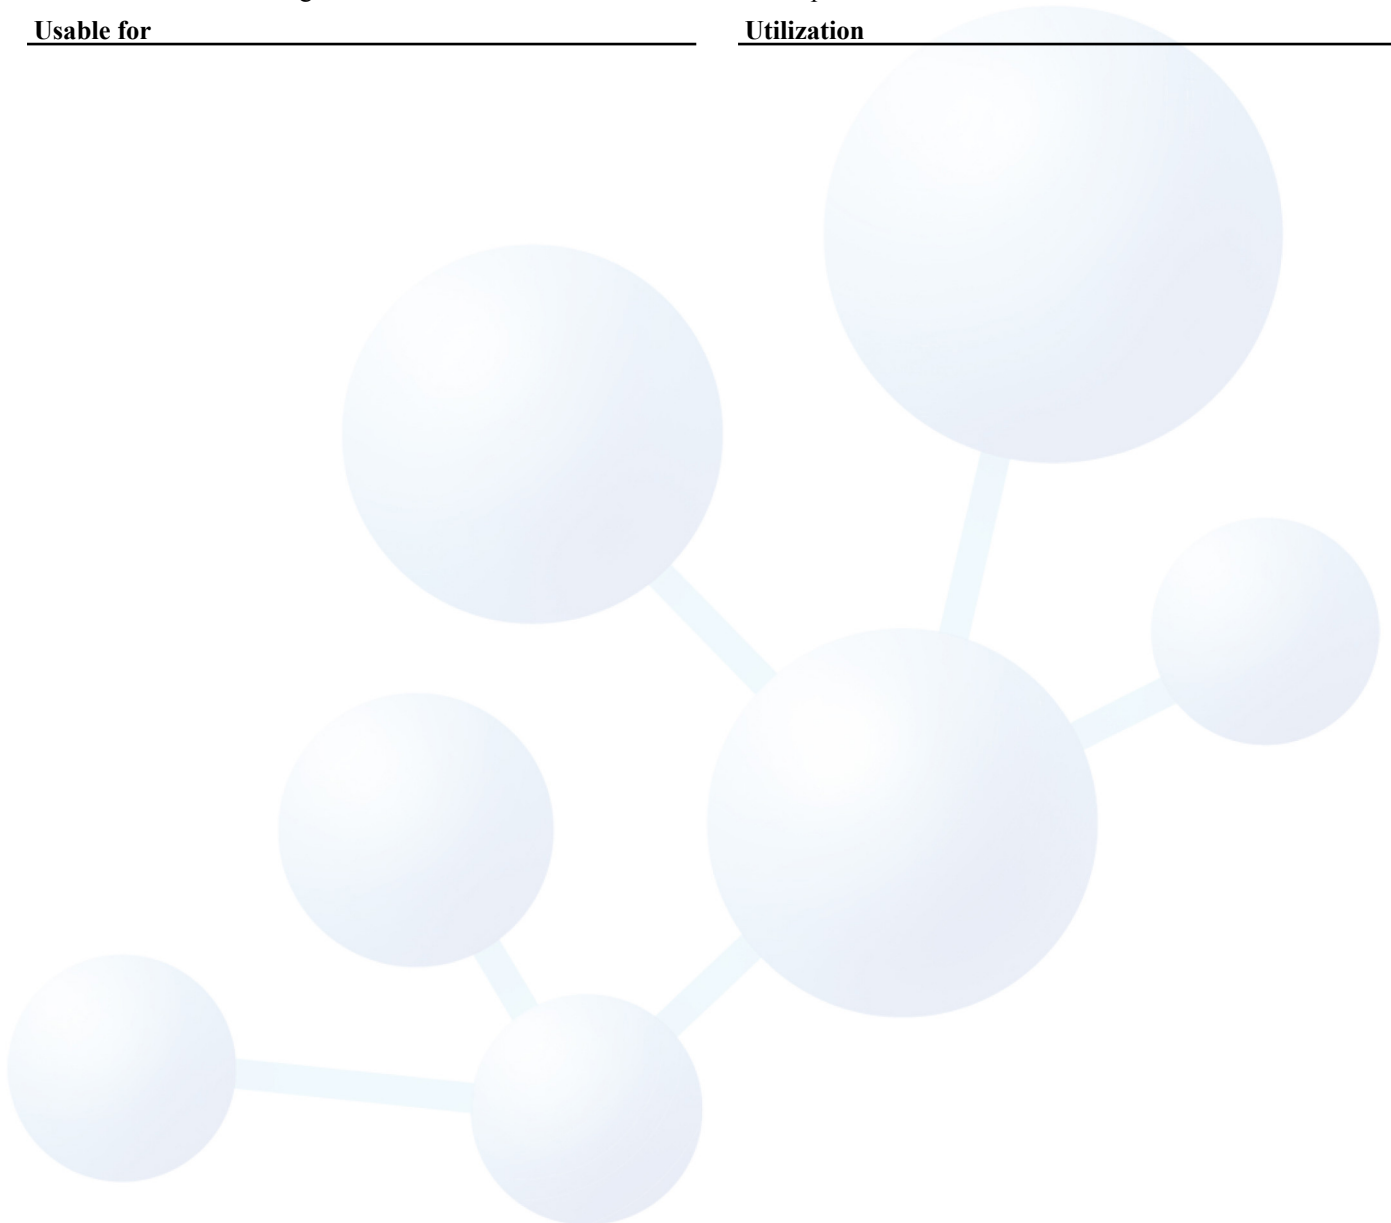

Data are subject to change.

Attention: Service instructions should be observed!

STL/GE/AU/-
07/2021

We recommend this product for:	
GENERAL-MOTORS-CORPORATION	Dexron VI
AISIN WARNER	AW-1, JWS 3324 , AW F8 FXX
ATF	Type 3.0/3.1
BENTLEY	P/N PY112995PA
BMW/MINI	P/N 83 22 0 142 516, P/N 83 22 0 397 114, P/N 83 22 2 163 514 (BMW 8072 B), ATF3+
CHRYSLER/DODGE/JEEP	P/N 05127382AA, P/N 68043742AA
FORD/LINCOLN/MERCURY	P/N XT-10-QLV (LV), P/N XT-6-QSP or -DSP (SP)
GM/GMC/OPEL/SATURN	AW1, P/N 88863400, 88863401
HONDA/ACURA	DW-1
HONDA	082000-9017 (ATF Type 3.1)
HYUNDAI/KIA	NWS-9638 T-5, P/N 040000C90SG, SP-IV / SPH-IV
JAGUAR/LANDROVER	Fluid 8432
JASO	M315, Class 1A
LAND ROVER	P/N TYK500050, LR0022460
MASERATI	P/N 231603
MAZDA	FW 6A EL, FW 6AX EL
MB	236.12, 236.14, 236.41
MERCON	LV
MITSUBISHI	ATF-J3, SP-IV, Dia-Queen ATF-PA,SP-N,SPH-IV,SP-IV-RR
NISSAN/INFINITY	Matic-S
PORSCHE	P/N 000 043 304 00
SAAB	P/N 93 165 147 - AW-1
SHELL	3353/134/M-1375.4/12108
TOYOTA/LEXUS/SCION	WS, Scion FZ
VW/AUDI	G 052 533, G 055 005 (-A, A2), G 055 540 (A2), G 060 162 (A1,A2,A6)
ZF	Lifeguardfluid 5/6

- Motor vehicle automatic transmission according service instructions
- Not suitable for use in DCT/DSG- or CVT-transmissions

Disposal:

- XANA 6STEP ATF is assigned to category 2 of used oils and thus is free for disposal.

Miscibility:

- XANA 6STEP ATF is only miscible with comparable lubrications and well tolerated. However, to get full advantage of XANA 6STEP ATF it is recommendable to use XANA 6STEP ATF when refilling.

XANA 6STEP ATF		
Article No.	Packaging unit	
STL 1030 592	Can	1 L
STL 1030 595	Can	20 L
STL 1030 596	Drum	60 L
STL 1030 598	Drum	200 L
STL 1430 599	PE-Container	1000 L

Typical characteristics:		
Specific weight at 15°C	kg/m ³	841
Dynamic viscosity at -40°C	mPa.s	-
Viscosity at 40°C	mm ² /s	27,1
Viscosity at 100°C	mm ² /s	5,6
Viscosity index		157
Flash point COC	°C	226
Pourpoint	°C	-45
Colour		Red